


# Patient Cables - Unshielded

AAMI Compliant, Safety (DIN Style) ECG Patient Cables


## 3 Lead

Part #	Description	Connector #	Resistors
1306	Patient Cable, GE Marquette	004	with 1K
1316	Patient Cable, GE Marquette	004	without
1340	Patient Cable, AAMI 6 Pin	001	with 1K
1351	Patient Cable, AAMI 6 Pin	001	without
1385	Patient Cable, Phillips (HP-Agilent)	002	with 1K
1396	Patient Cable, Phillips (17 pin ECG)	003	with 1K


PART NO **13XX-0L**




POS	COLOR	PN
LA	BLK	4
LL	RED	8
W/C	ORG	11
W/C	GRN	11
RA	WHT	1
SHELD		11




POS	COLOR	PN
LA	BLK	J
LL	RED	C
W/C	ORG	J
		E
RA	WHT	A
SHELD		F



POS	COLOR	PN
LA	BLK	7
LL	RED	6
W/C	ORG	C
W/C	GRN	C
RA	WHT	1
SHELD		C



POS	COLOR	PN
LA	BLK	B
LL	RED	C
W/C	ORG	F
W/C	GRN	F
LL	RED	E
RA	WHT	A
SHELD		F

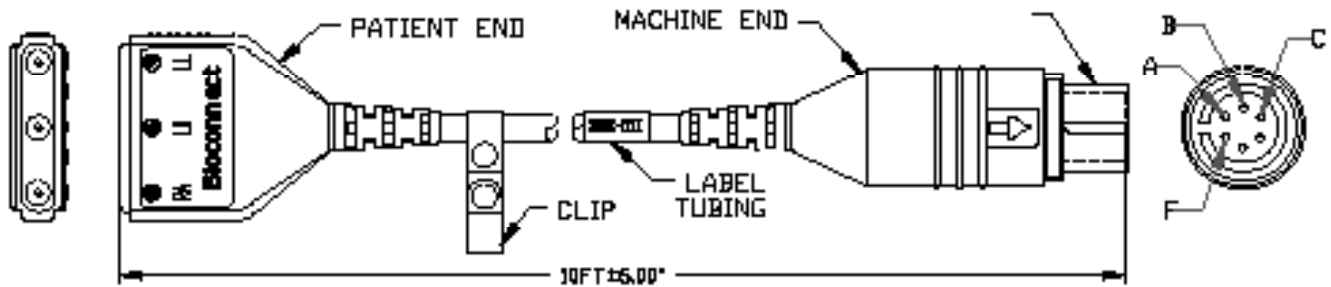

Dimensions are in inches  
Unless otherwise noted

.xxx±.005  
.xx±.010  
.x±.020

Unless otherwise specified  
1 coiled cable and package insert to be  
placed in plastic bag



## ASSY, UNSHIELDED CABLE ALL CONNECTORS

SIZE	A	SCALE	NTS	DWG NO.	13XX-0L
------	---	-------	-----	---------	---------

This drawing contains information proprietary to RF Industries, any unauthorized use of this drawing is expressly prohibited without written permission from RF Industries. Any violation is punishable under U.S. Copyright Laws.



7610 Miramar Road, San Diego, CA 92126

Tel (858) 549-6340, (800) 233-1728 • Web: [www.biocables.com](http://www.biocables.com) • Email: [bio@biocables.com](mailto:bio@biocables.com)

# Patient Cables - Unshielded

AAMI Compliant, Safety (DIN Style) ECG Patient Cables

## DEVICE CONNECTORS

Bioconnect stocks patient cables that are compatible with an extensive list of medical monitoring devices. All device connectors are overmolded with medical grade Santoprene® and feature flexible strain reliefs for durability and ease of use.



## CABLE SHIELDING

All Bioconnect Patient cables are constructed using cable designed to our exacting specifications with medical grade Santoprene® (TPE) jacket, copper center conductors, PE insulation and dual shielding. This low noise cable minimizes triboelectric noise and electrical interference. Cable can be made with inductors (HF Chokes) or resistors if required. Where monitors are subject to EMI or ESU interference, cables may need to be equipped with ferrite beading. Contact Sales for availability of filtered cables.

## SHEET CLIP

Anchors cable in place while in use.

## FLEX RELIEFS

Robust, Santoprene® flex reliefs are located at yoke and device ends of all cables ensuring long life and reducing continuity disruption.

## TRACEABILITY

All Patient cables are clearly marked with part numbers and lot control information.

## YOKE MARKING

To facilitate lead attachment, cable yokes are labeled to clearly show channel designations and color codes. AHA and IEC color codes are available.

## SAFETY INTERFACE

This series of three and five lead Bioconnect Patient cables are designed for use with unshielded Safety DIN 42-802 lead wires. Other configurations are available as custom items.

**Santoprene®** (TPE) is the latex-free material chosen for use in our cables and leads. Yokes, over-molds and flex reliefs are fabricated using the same TPE used in the wire and cable jackets to provide the most solid bond between cable components. This increases product life and patient comfort and safety. Santoprene® can be sterilized using most common methods: gamma irradiation and EtO. It is impervious to most cleaning solutions and solvents.

Santoprene® is a registered trademark of Advanced Elastomer Systems.

AHA Standard color coding is used on parts listed on this page. AHA alternate, IEC Standard and IEC Alternate color coded cables and matching lead set are available. Call for a quotation.



**Bioconnect**

7610 Miramar Road, San Diego, CA 92126

Tel (858) 549-6340, (800) 233-1728 • Web: [www.biocables.com](http://www.biocables.com) • Email: [bio@biocables.com](mailto:bio@biocables.com)